

Technical specifications

PWS10420250222


The CEM4-C junction box is able to communicate up to 4 load cells: it synchronizes measurements and ensures correct and accurate weight values. The CEM4-C product collects the signals of the individual cells and translates them into a single signal. Our junction boxes are equipped with a quick connector for connecting our Tester 1008, which allows immediate control of the signals of the individual cells and system diagnostics.

Temperature range:	-30 ÷ +70 °C (max 85% humidity without condensation)
---------------------------	--

Storage temperature:	-30 ÷ +75 °C
-----------------------------	--------------

Drilling template:	188 x 118 mm (L x H)
---------------------------	----------------------

Dimensions:	200 x 150 x 75 mm (L x H x D)
--------------------	-------------------------------

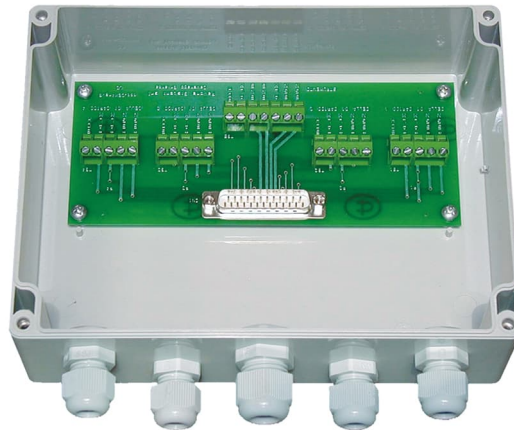

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).



All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).