

General information

PWS3320250222

The BLH NOBEL KIMD-M load cell has a high accuracy, it is easy to install and it has a movable loading point. The BLH NOBEL KIMD-M load cell is able to handle the expansion due to increases of temperature and it has a high load capacity. It is ideal for weighing tanks, silos, vessels and big silos. The load cell BLH NOBEL KIMD-M is also available for extreme temperatures from - 40 to + 100 °C.



Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

Weight Transmitter [UWT 6008](#)

Weight Transmitter [DAT 1400](#)

Weight Indicator [MCT 1302](#)

Tester 1008 [TESTER 1008](#)

Junction Box [CGS4-C](#)

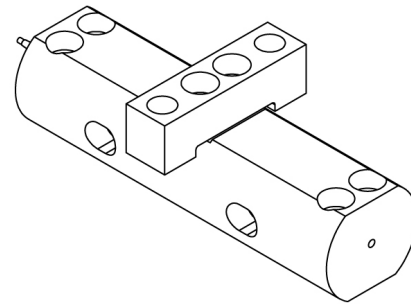
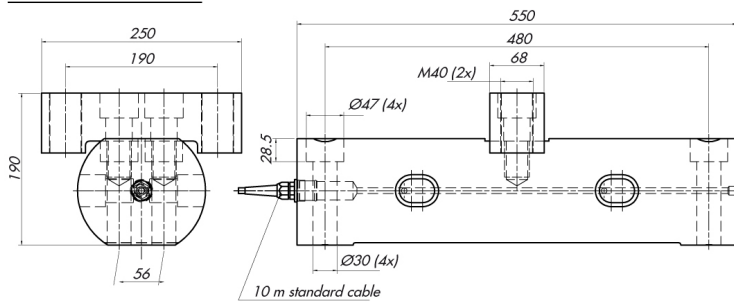



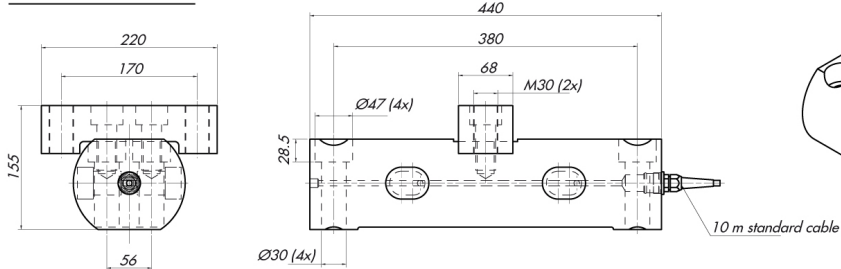
All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications

PWS3320250222

Rated load RL:	500, 1000, 1500, 2000 kN
Combined error:	±0.1 % RO
Repeatability:	0.02 % RO
Creep (30 minutes):	±0.03 % RL
Safe overload:	100 % RL
Ultimate overload:	200 % RL
Material:	Yellow chromate steel
Degree of protection:	IP67
Temperature range:	-40 ÷ +80 (+100 optional)°C
Temperature effect on zero balance:	±0.005 % RO/°C
Temperature effect on output:	±0.005 % of output/°C
Rated output RO:	1.0 mV/V ±0.25 %
Insulation resistance:	> 4 G Ohm
Input resistance:	350 ± 5 Ohm
Output resistance:	350 ±0.5 Ohm
Recommended input:	10 Vdc/ac
Maximum supply voltage:	18 Vdc/ac
Tolerance of shunt calibration values:	±0.25 %

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

DIMENSIONS 1500 - 2000 kN

DIMENSIONS 500 - 1000 kN


All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).