


## General information

PWS24920241016

The PSTA2 off center load cell is particularly suitable for the construction of industrial and bench electronic scales, piece counters and packaging machines. The PSTA2 single point cell is able to measure correctly even with off-center loads and guarantees high precision, maximum reliability and long life. Pavone Systems also supplies the ATEX version on request. The PSTA2 off center load cell has a 4 meter long shielded cable with 4 conductors.

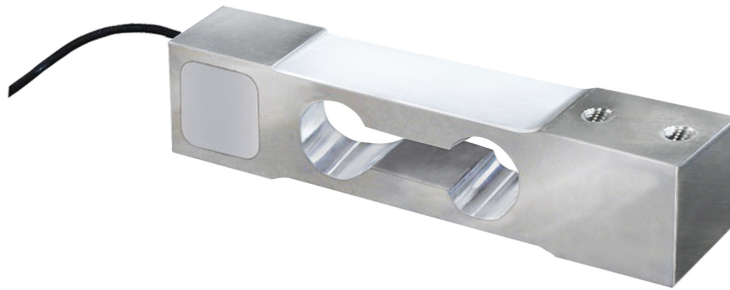


All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS24920241016

<b>Rated load (RL):</b>	6, 10, 15, 20, 25, 30, 35, 40 Kg
<b>Combined error:</b>	±0,05 % RO
<b>Repeatability:</b>	±0.03 % RO
<b>Creep (30 minutes):</b>	±0.03 % RO
<b>Safe overload:</b>	150 % Full scale
<b>Gain drift:</b>	±0,002 % Full scale
<b>Ultimate overload:</b>	300 % Full scale
<b>Material:</b>	Steel Inox AISI 431
<b>Degree of protection:</b>	IP65
<b>Deflection:</b>	0.2 ÷ 1.4 mm
<b>Compensated Temperature:</b>	-10 ÷ +50 °C
<b>Temperature range:</b>	-20 ÷ +70 °C
<b>Temperature effect on zero balance:</b>	±0.003 % RO/°C
<b>Temperature effect on output:</b>	±0.002 % output/°C
<b>Insulation resistance:</b>	> 2000 MOhm
<b>Input resistance:</b>	380 ÷ 386 Ohm
<b>Output resistance:</b>	349 ÷ 353 Ohm
<b>Maximum supply voltage:</b>	15Vdc
<b>Maximum platform size (mm):</b>	300 x 300
<b>Output signal:</b>	2 mV/V
<b>Zero thermal drift:</b>	±0,003 % full scale/°C

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).

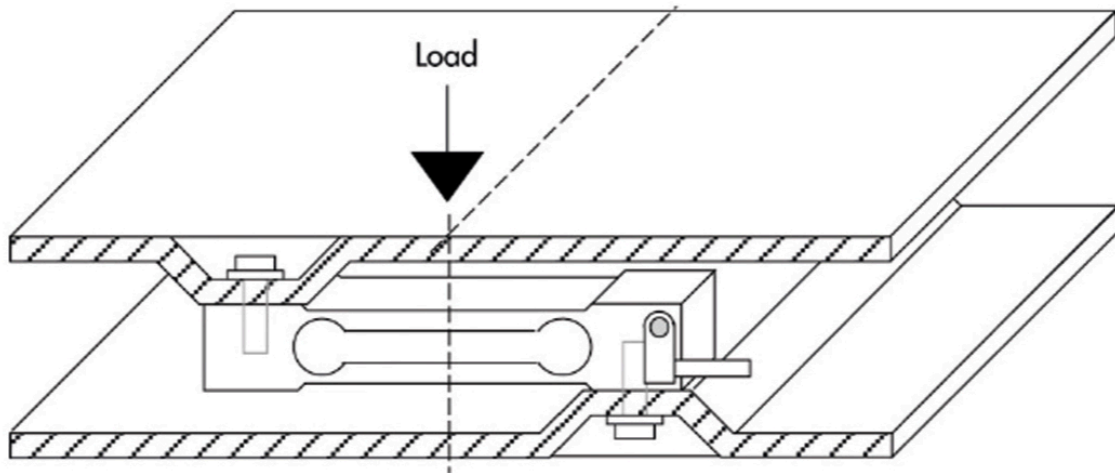

**MOUNTING EXAMPLE**
**Electrical Connection**

+Excitation	Red
-Excitation	White
+Signal	Green
-Signal	Blue
Shield	Cable shield

Error is within 0.02% SN applied with 1/2 of capacity at the position of 75mm of eccentricity

The center of loading plate and the center of the load cell should be the same position

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).

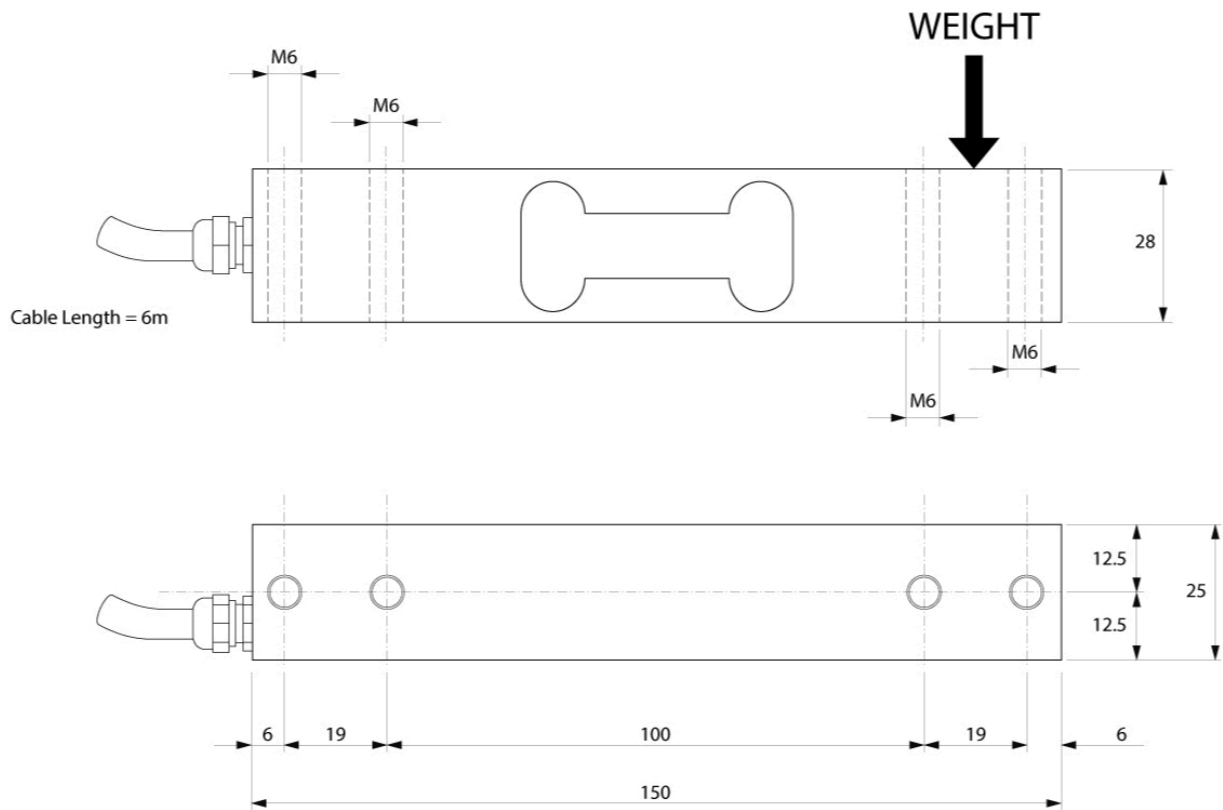

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).